



Main Features

The main meter and the bypass meter are arranged one behind the other in the direction of flow.

There is no longer any need for the differentiation between the "bypass meter on the right" and "bypass meter on the left".

Removable measuring element consisting of the main meter, the change-over valve and the bypass meter ("3 in 1" concept)

A multirange measuring element (compatible for DN 50, 80 or 100) allows an easy economical replacement after the calibrated validity period has expired.

Main meter with hydrodynamic balanced rotor

Spring-loaded change-over valve with low headloss

Bypass meter specified as a velocity or piston meter cartridge with plug-in non-return valve

Minimum flowrate (Q_{min}): 6 l/hour for piston type bypass meter

Available in body lengths specified as per DIN 19625 and ISO 7858

Application

Measurement of high flow rates with extremely wide spread flow profile

Measurement of smallest flow rates for leakage detection

Ideal for fire service pipes

Options

Main and bypass meters fitted with pulsers (reed, optical)

Main and bypass meters equipped with electronic registers (Encoder, Hybrid or fully Electronic)

Spool piece for extension of meter casing as per DIN 19625

Preparation for quarter inch pressure sensor

Change-over valve with non-return valve function up to PN 10 as per DIN 3269

UK & Ireland Enquiries

Sensus Metering Systems
11 The Quadrangle, Abbey Park,
Romsey, Hampshire SO51 9DL UK
T: +44 (0) 1794 526100
F: +44 (0) 1794 526101
Email: info.gb@sensus.com

www.sensus.com

International Enquiries



Sensus Metering Systems GmbH Ludwigshafen
Industriestraße 16,
67063 Ludwigshafen Germany
T: +49 (0) 621-6904-0
F: +49 (0) 621-6904-1409
Email: info.int@sensus.com

www.sensus.com

Pattern Approval

6.152	Metrological Class B 30 °C
01.16	

Installation

Pipe	horizontal vertical * inclined *	
Meter Head	upwards sideways *	

* Only with piston bypass meter type 612 and RPD
Unrestricted straight pipe in front of the meter 3 x DN.
No requirements behind the meter.

Technical Data


Nominal Diameter	DN mm	50	65	80	100
Size of meter (EEC)	Q_n	15	25	40	60
Working pressure	PN bar	16			
Maximum peak flow (1 x 24 hours)	Q_{max} m ³ /h	90	120	200	280
Continuous flow	Q_n m ³ /h	50	70	120	180
Bypass meter	Q_n m ³ /h	2.5			
Transitional flow $\pm 2\%$ *	Q_t m ³ /h	0.0375			
Change over with increasing flow	m ³ /h	2.3			
	m ³ /h	1.2			
Lower measuring limit $\pm 5\%$	Q_{min} m ³ /h	type 612 = 0.006 XNP = 0.02			

* values valid for multijet meter cartridge XNP

Pulse Values


Main meter	RD 01	0.1 m ³ and 1 m ³
	OD 01	0.001 m ³
	OD 03	0.01 m ³
Bypass meter (type 612)	HRI	0.001 m ³ , 0.01 m ³ , 0.1 m ³ or 1 m ³
Bypass meter	OD 01	0.1 Ltr.
	OD 03	1 Ltr.
RPD	RD 01	0.01 m ³ and 0.1 m ³

Typical Accuracy Curve

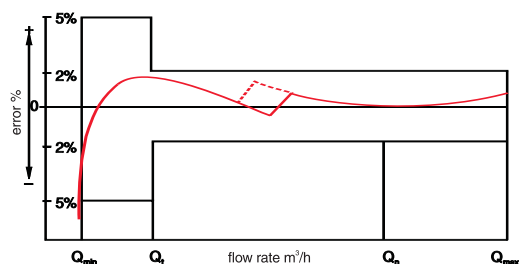


Q_{max} = maximum peak flow
 Q_n = continuous flow
 Q_t = transitional flow $\pm 2\%$
 Q_{min} = minimum flow $\pm 5\%$

Typical Head Loss Curve

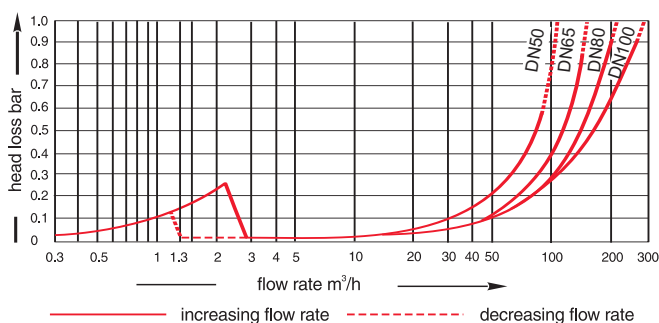

Dimension Picture

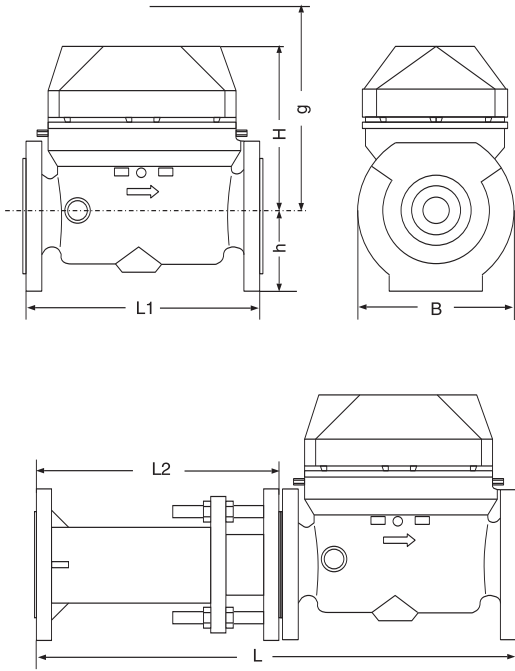

Dimensions and Weights


Nominal Diameter	mm	50	65	80	100	
Size of meter (EEC) Qn		15	25	40	60	
Overall length						
L1	mm	270		300	360	
L1	mm	300	300	350	350	
Height		220				
H	mm	220				
h	mm	80	92.5	100	100	
g	mm	475				
Length						
L2	mm	330±40		400±60	440±60	
L*	mm	600±40		700±60	800±60	
Width	ca. mm	185	23.0	24.6	26.1	31.0
Weight						
meter	kg	21	23.6	23.5	28.5	
measuring unit	kg	7				
spool piece	kg	10.5		16.5	20.5	

* for Meitwin with body length according to DIN 19625


Materials

Body	Main meter	cast iron
	Bypass meter	brass
	Measuring element both meters	plastic
	Rotor both meters	plastic
	Spring loaded valve	plastic and stainless steel

Dials



Main meter



Bypass meter cartridge
(Type M-N Q_N 2,5 XNP)

Bypass Meters

Standard Bypass meter

Multijet meter cartridge wet dial

type M-N QN 2,5 XNP

Options:

Piston meter cartridge dry dial

- with pulser
- with Standard register
- with Encoder register
- with Hybrid register
- with Electronic register

type 612 QN 2,5 K =...
type RPD QN 2,5 Standard
type RPD QN 2,5 Encoder
type RPD QN 2,5 Hybrid
type RPD QN 2,5 Electronic



Bypass meter cartridge
(type M-N QN 2,5 XNP)



Bypass meter cartridge
(type RPD QN 2,5)

Available design

Size	DN	50	65	80	100
Nominal size	Qn	15	25	40	60
Overall length as per DIN 19625					
Overall length	(mm)	270		300	360
Order n°		82 92 99		82 93 00	82 93 01
Overall length as per ISO 4064					
Overall length	(mm)	300	300	350	350
Order n°		82 93 74	82 93 75	82 93 76	82 93 77
Measuring unit		82 93 18 *	82 93 02 **	82 93 18 *	82 93 18 *

* Multi-range measuring unit, compatible for DN 50, 80 & 100 in DIN and ISO lengths

** Essential to mention DN 65 in your order

Spool pieces for extension of meter casing as per DIN 19625					
Size	DN	50	65	80	100
Overall length	mm	330±40		400±60	440+60
Order n°		82 83 31		82 83 33	82 83 36

Order example

Meitwin, DN 50, 50/16	Type
Drilled to DIN 2501 PN 16	Size
Type 612 bypass meter QN 2.5 with 100-litre remote counting pulse	Temperature
Overall length 270 mm	Pressure
Change-over valve with/without reverse flow preventer	Flange drilling
82 92 99	By-pass meter
With sliding compensator	Overall length
DN 50	Type of measurement element ***
82 83 31	Order n°
	Fittings
	Nominal width
	Order n°

*** Please state as appropriate. If desired, the reverse flow preventer function can be retrofitted at any time by replacing the measuring unit.

f the Meitwin is ordered with a RPD type by-pass meter, it is supplied with a head assembly covering both, main and by-pass meter register.