

Quantometer QA / QAe

Flow meters with mechanical (QA) or electronic totalizers (QAe)

Applications

Media: Methane, city gas, natural gas, *

Branches: Industry, trade, chemicals, food-stuffs, **

Functions: Metering, control, regulation, registration, ***

Brief information

Elster-Instromet Quantometers are highly reliable gas meters which can be used throughout the entire field of flow metering and which fulfil all of the varying requirements of industrial metering. The QA and QAe quantometers work on the principle of the rotating turbine wheel. The rotation of the turbine wheel is proportional to the volume of the flowing gas and this volume (V_b/m^3) is registered by either a mechanical (QA) or an electronic (QAe) totalizer.

Self-lubricating bearings ensure that the quantometers operate completely without any maintenance.

On account of the proven metering principle and the quality of the materials in use, the quantometers meet the highest standards. By using the quantometers in production and heating processes, it is possible to control the flow of gas precisely and therefore optimise the use of energy.

The QA quantometers are fitted with a 7-digit mechanical totalizer which registers the volume V_b in cubic meters (m^3).

The QAe quantometers are equipped with an electronic totalizer. Besides the normal registration of the total volume (V_b, m^3), the QAe can also display the flow rate ($Q_b, m^3/h$), the volume of a key-day (m^3 / V_b on the key-day) and the date of the key-day. This means that the user can easily calculate the gas consumption for any specific part of the building or for any cost centre at any chosen time.

Installation tips: The Elster-Instromet quantometers can be installed easily in the pipeline. The position of the installation can be selected as required.

The flow direction is clearly marked by an arrow on the meter housing.

Interfaces/Outputs:

- QA: E1 Reed switch
- QA/QAe: E 200 Namur output (in accordance with DIN EN 50227)
- QAe: optical interface (in accordance with EN 1434 - ZVEI compatible)
- QAe: M-BUS interface (in accordance with EN 1434)

* non-aggressive gases, inert gases

** district heating, power plants, petrochemicals, station building

*** monitoring, evaluation



Main features

- Compact gas meter
- Meter sizes
QA/e 10 - QA/e 1000
- Flow ranges
1.6 –1600 m^3/h
- Measuring range up to 1:20,
at higher pressures up to 1:50
- Nominal width DN 25 - DN 150
- Aluminium housing
- Gas temperature
-10°C up to +60°C
- QA: Ambient temperature
-20°C up to +70°C
- QAe: Ambient temperature
0°C up to +50°C
- Maintenance-free
- QA:
protection class IP52
7-digit mechanical totalizer
- QAe:
protection class IP44
7-digit LCD display showing:
- actual volume (basic state)
- high-resolution volume
(digits after the point)
- current flow rate
- key-day values / key-day date
- back-flow volume
- Metering accuracy in wide
ranges independent of
physical characteristics of
the gas such as density,
temperature and pressure
- Quantometer QA DN 25:
special version with stainless
steel housing possible
- DVGW- approved

Quantometer QA / QAe: Flow meters

Technical data


		QA/e 10 - QA/e 40 G I	QA/e 40 GF I	QA/e 65 - QA/e 1000 Z I	QA 10 - QA 40 G II / F II			
Medium/ maximum pressure	Combustible gases	4 bar	4 bar	20 bar (QAe 4 bar)	G II: 4 bar F II: 40 bar / ANSI300			
	Air, non-aggressive gases, inert gases	16 bar	16 bar	20 bar	G II: 16 bar F II: 40 bar / ANSI300			
Metering technology	Measuring range m ³ /h	QA/e 10 DN25: 1.6 - 16 QA/e 16 DN25: 2 - 25 QA/e 25 DN25: 2.5 - 40 QA/e 40 DN25: 3.3 - 65	QA/e 40 DN40: 5 - 65	QA/e 65 DN 50: 6 - 100 QA/e 100 DN 80: 10 - 160 QA/e 160 DN 80: 13 - 250 QA/e 250 DN100: 20 - 400 QA/e 400 DN100: 32 - 650 QA/e 400 DN150: 32 - 650 QA/e 650 DN150: 50 - 1000 QA/e1000 DN150: 80 - 1600	QA/e 10 DN25: 1.6 - 16 QA/e 16 DN25: 2 - 25 QA/e 25 DN25: 2.5 - 40 QA/e 40 DN25: 3.3 - 65			
	Max. error 0.1 Q _{max} - 0.2 Q _{max}	< 3% of reading (< 1% of rating)						
	Max. error 0.2 Q _{max} - Q _{max}	< 1,5% of reading (< 1% of rating)						
Housing	Material	Aluminium				Stainless steel		
	Diameter DNmm	25	40	50	80	100	150	25
	"	1"	1 1/2"	2"	3"	4"	6"	1"
	Dimensions A * mm	159	202	202	225	245	300	155
	C mm	240	190	60	120	150	180	189
	C1 mm	185	126.5	-	-	-	-	-
	G * mm	115	150	150	150	165	190	90
Weight kg	1	2.2	1.4	5.3	6.8	11.4	5.2	
Assembly	In pipes with screw connections according to DIN ISO 228 1" internal thread	In pipes with screw connections according to DIN ISO 228 1 1/2" internal thread	Installation between flanges PN 10/16 (DIN EN 1092-1) or ANSI 150		Flange connection PN 40 (DIN EN 1092-1) or in pipes with screw connections according to DIN ISO 228 1" internal thread			
Outputs / pulse values	LF-type E1 Reed switch	10 imp/m ³	1 imp/m ³	1 imp/m ³		10 imp/m ³		
	MF-type E200 inductive proximity switch	500 imp/m ³ **	250 imp/m ³	QA 65 : 250 imp/m ³ QA 100 - 650 : 187.5imp/m ³ QA/e100-1000 : 187.5imp/m ³		500 imp/m ³ **		

* QAe +25mm

** from 01/01/2002 on


Pulsers

QA LF-pulser E1

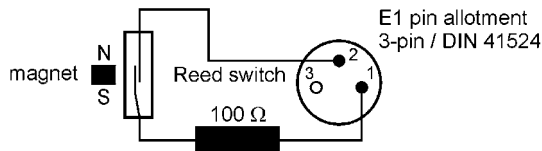

Voltage: U_{max} = 24 V
Current: I_{max} = 50 mA
Capacity: P_{max} = 0.25 W
Resistance: R_v = 100 Ω ± 20%

QA/QAe MF-pulser E200

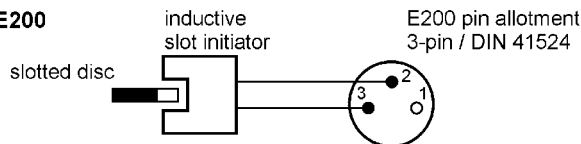

Characteristics of switch version
according to DIN EN 50227 (Namur)
Standard voltage: U_n = 8 V DC
Internal resistance: R_i = 1 k Ω
Current consumption:
Active surface open I ≥ 2.1 mA
Active surface closed I ≤ 1.2 mA

Your contacts

Elster-Instromet GmbH
Steinern Str. 19 - 21
55252 Mainz-Kastel, Germany
Tel. +49 6134 605 0
Fax +49 6134 605 223
www.elster-instromet.com

Elster-Instromet N.V.
Rijkmakerlaan 9
2910 Essen, Belgium
Tel. +32 3 670 0700
Fax +32 3 667 6940

American Meter Company
132 Welsh Road, Suite 140
Horsham, PA 19044, USA
Tel. +12 15 830 1800
Fax +12 15 830 1890

For your local contact refer to
www.elster-instromet.com